



FUNCTION

- On / off acceleration, shock, impact, and spin detection

APPLICATIONS

- Damage detection for medical products
- Acceleration-activated safety and warning systems
- Sports safety, toys, games
- Security, anti-tamper, anti-theft, alarms

DESCRIPTION

The SQ-ASx series sensors act like acceleration sensitive switches that open or close when accelerated past an acceleration threshold.

The sensor can be used to produce CMOS or TTL pulses to interrupt (wake up) a microcontroller. The sensor is fully passive, requires no signal conditioning, and operates with zero current or only 50 nA depending on model.











PATENTS

Patented. United States: 8367952,
China: 101960316. Patents pending.

FEATURES

- Miniature Size** - 3.3 mm x 6.9 mm
- Simple Interface** - No signal conditioning required
- Made in USA** - fully automated production, 100% testing
- Fast Response** - < 100 uS
- Multiple Sensitivities** - 10 G to 4000 G standard
- Zero-power** - or nanopower
- Industrial Rated** - 10 year life, -40° to 85° C

FUNCTIONAL DIAGRAMS

INPUT	OUTPUT
<p>SQ-ASA series Axially sensitive, singled ended, normally closed</p>	
	
<p>SQ-ASC series Axially sensitive, single ended, normally open</p>	
	
<p>SQ-ASD series Omnidirectional, normally open</p>	
	
<p>SQ-ASE series Radially sensitive, normally open</p>	
	
<p>SQ-ASF series Radially sensitive in one direction, normally open</p>	
	

* See Functional Behavior for more details

TABLE OF CONTENTS

Characteristics.....3

Dimensions For ASA & ASC.....3

Dimensions ASD & ASE.....4

Dimensions ASF5

Example PCB Landing.....6

Theory of Operation.....7

Functional Behavior.....7

Part Comparison.....8

Product Comparison.....8

Ordering Guide8

Limitations and Warnings.....9

Testing.....9

System Integration Testing9

Notice.....9

Further Information.....9


Notes9

CHARACTERISTICS

PARAMETER	MIN	MAX	CONDITIONS
Shock Survival		7,000 g	5x, 0.1 ms half-sin, any axis
Storage Temperature	-40° C	85° C	
Supply Voltage Range	0.5 V	12 V	
Current Sink*	50 nA	10 mA	


* Current consumption is determined by the resistance of the application circuit and the supply voltage.

DIMENSIONS FOR ASA & ASC

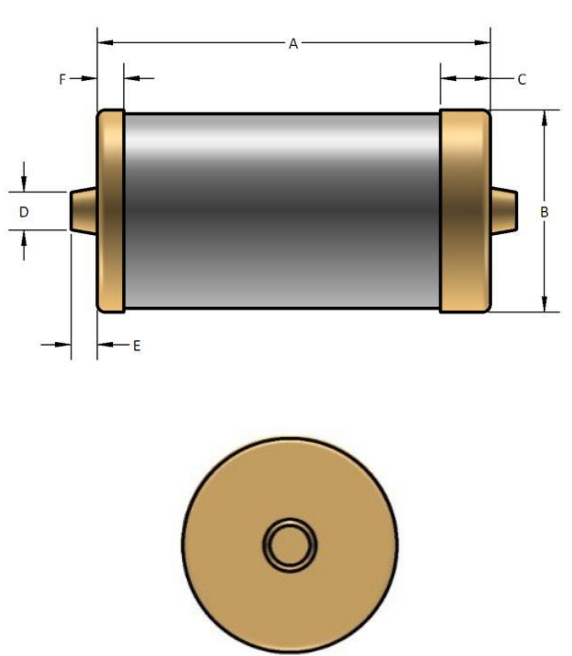
PHYSICAL SIZE			
			
SYMBOL	DESCRIPTION	MM	TOLERANCE
A	Length	6.8	±0.25
B	Diameter	3.3	±0.1
C	Terminal Width	0.8	±0.25
D	Solder Nub Diameter	0.9	±0.25
E	Solder Nub Length	0.4	±0.1
F	Terminal Width 2	.4	±0.25

DIMENSIONS ASD & ASE

PHYSICAL SIZE

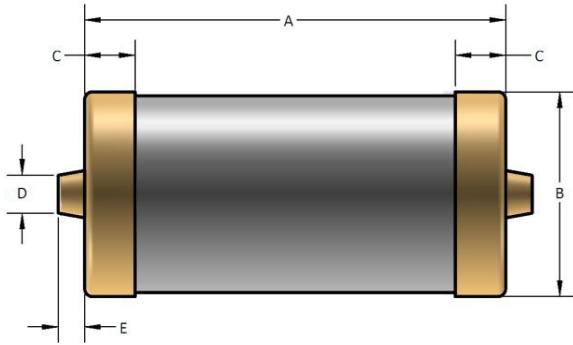


SYMBOL	DESCRIPTION	MM	TOLERANCE
A	Length	6.8	±0.25
B	Diameter	3.3	±0.1
C	Terminal Width	0.8	±0.25
D	Solder Nub Diameter	0.9	±0.25
E	Solder Nub Length	0.4	±0.1




DIMENSIONS ASF



PHYSICAL SIZE

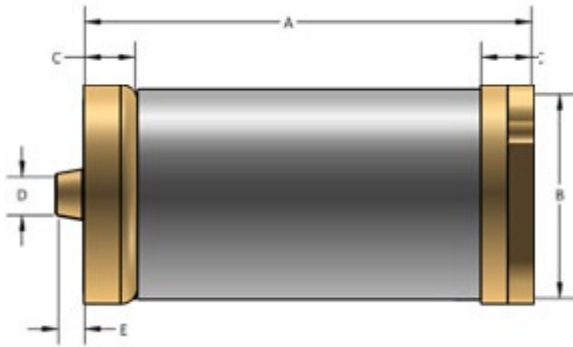

SYMBOL	DESCRIPTION	MM	TOLERANCE
A	Length	6.8	±0.25
B	Diameter	3.3	±0.1
C	Terminal Width	0.8	±0.25
D	Solder Nub Diameter	0.9	±0.25
E	Solder Nub Length	0.4	±0.1

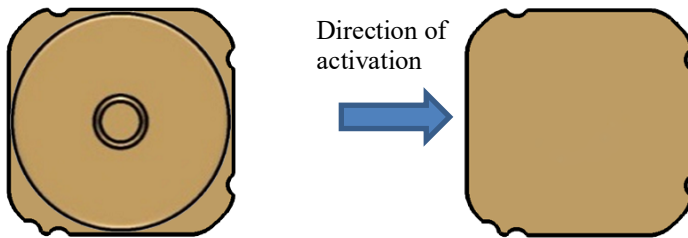

EXAMPLE PCB LANDING

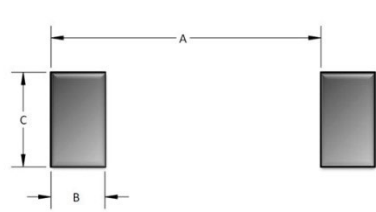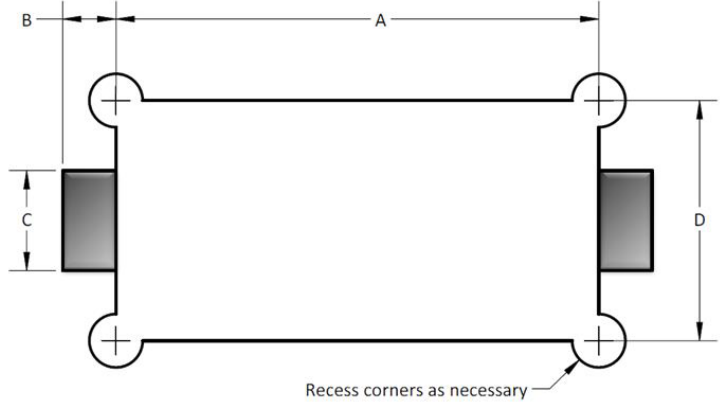RECOMMENDED PCB LANDING			ALTERNATE, PCB CUTOUT LANDING (USE FOR LOWEST PROFILE)		
SYMBOL	DESCRIPTION	MM	SYMBOL	DESCRIPTION	MM
A	Pitch	6.0	A	Recess Length	7.25
B	Pad Length	1.2	B	Pad Length	0.8
C	Pad Width	2.1	C	Pad Width	1.5
					

***Note:** Alternative layouts may be used to optimize size or manufacturability

THEORY OF OPERATION

Acceleration causes a spring and/or weight to either open or close a circuit depending on model. For ASF model, only acceleration in one direction causes the circuit to close and is mechanically blocked from closing from other directions.

FUNCTIONAL BEHAVIOR

SQ-ASA

The SQ-ASA series sensor is a normally **closed** device. It is designed to be sensitive only in one direction. However, it will exhibit some off axis sensitivity. Typical cross axis open signals are in the 2 – 8 mS range, where on axis open signals are proportional to the duration of acceleration above the threshold.

SQ-ASC

The SQ-ASC series sensor is a normally **open** device. It is designed to be sensitive only in one direction and is very immune to cross axis acceleration. Only if a cross axis event is 10 times greater than the rated threshold may the sensor trigger in a cross axis mode.

SQ-ASD

The SQ-ASD series sensor is a normally **open** device. It is designed to be sensitive in all directions. The sensor will trigger radially or in the terminal 1→2 direction when acceleration is applied. In the terminal 2→1 direction, the sensor will trigger after the acceleration is removed (rebound effect). **NOTE:** If using the rebound trigger in the 2→1 direction is not appropriate for the application, mount two sensor parallel in opposite directions.

SQ-ASE

The SQ-ASE series sensor is a normally **open** device. It is designed to be sensitive in a radial direction. The sensor will trigger radially when acceleration is applied. **NOTE:** To achieve an omnidirectional response mount two sensors at 90 degrees to one another in any plane, logically “OR’ed” together.

SQ-ASF

The SQ-ASF sensor is a normally **open** device. It is designed to be sensitive in a single radial direction, while not closing in other directions. The sensor will trigger radially when acceleration is applied in the direction indicated by the square end rivet. The edge of the rivet without indexing marks indicates the trigger direction.

PART COMPARISON

PART NUMBER	TYPE	SENSITIVITY	ACCELERATION THRESHOLD (ON AXIS)
SQ-ASA-150	Normally closed	One axis, single sided	150 G
SQ-ASE-030	Normally open	Radial axis	30 G
SQ-ASE-060	Normally open	Radial axis	60 G
SQ-ASE-100	Normally open	Radial axis	100 G
SQ-ASE-275	Normally open	Radial axis	275 G
SQ-ASE-1400	Normally open	Radial axis	1400 G
SQ-ASE-4000	Normally open	Radial axis	4000 G
SQ-ASF-030	Normally open	Radially in one direction	30 G
SQ-ASF-060	Normally open	Radially in one direction	60 G
SQ-ASF-100	Normally open	Radially in one direction	100 G
SQ-ASF-275	Normally open	Radially in one direction	275 G
SQ-ASF-1400	Normally open	Radially in one direction	1400 G
SQ-ASF-4000	Normally open	Radially in one direction	4000 G

PRODUCT COMPARISON

GRADE	ASSEMBLY METHOD	SEALED	WASHABLE	RoHS	OPERATING TEMPERATURE	CYCLES *	SERVICE LIFE (YRS)
I	Reflow Solder: 260° C peak Hand Assembly: 315° C peak, 2 -3 seconds on end terminal	Yes	Yes	Yes	-40° to +85° C	100,000	10
C	Reflow Solder: 260° C peak Hand Assembly: 315° C peak, 2 -3 seconds on end terminal	Yes	Yes	Yes	-25° to +70° C	100,000	5

*Test conditions – 0.5 gRMS, 5 to 200 Hz flat spectrum

ORDERING GUIDE

PART NUMBER	PACKAGING CODE	EXAMPLE COMPLETE ORDER NUMBER
SQ-ASx-xxx-C	TR - Tape on Reel	SQ-ASA-150-CTR
SQ-ASx-xxx-I	CT - Cut Tape TR - Tape on Reel	SQ-ASA-150-ICT SQ-ASE-060-ITR

LIMITATIONS AND WARNINGS

This product is not designed for use in life support and/or safety equipment where malfunction of the product can reasonably be expected to result in personal injury or death. Buyer uses this product in such applications at Buyer's own risk and agrees to defend, indemnify, and hold harmless SignalQuest, LLC. from any and all damages, claims, suits, or expenses resulting from such misuse.

TESTING

The performance of each sensor is verified through build-time testing.

SYSTEM INTEGRATION TESTING

Thorough testing should be carried out prior to product release to ensure system integration has not introduced unforeseen problems. The system integrator assumes the ultimate responsibility for the safety of the target application.

NOTICE

Information furnished by SignalQuest, LLC is believed to be accurate and reliable. However, this document may contain ERRORS and OMISSIONS. Accordingly, the design engineer should use this document as a reference rather than a strict design guideline and should perform thorough testing of any product that incorporates this or any other SignalQuest product. No responsibility is assumed by SignalQuest, LLC. for this use of this information, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications are subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of SignalQuest, LLC. Trademarks and registered trademarks are the property of their respective companies.

FURTHER INFORMATION

For pricing, deliveries, and ordering information, please contact SignalQuest at (603) 448-6266
For updates on this and other documents, visit our website at www.signalquest.com.

NOTES