


Type B
Male connector
Contact spacing
.100" and .200"


Directive 2002/95/EC
"RoHS"
Compliant

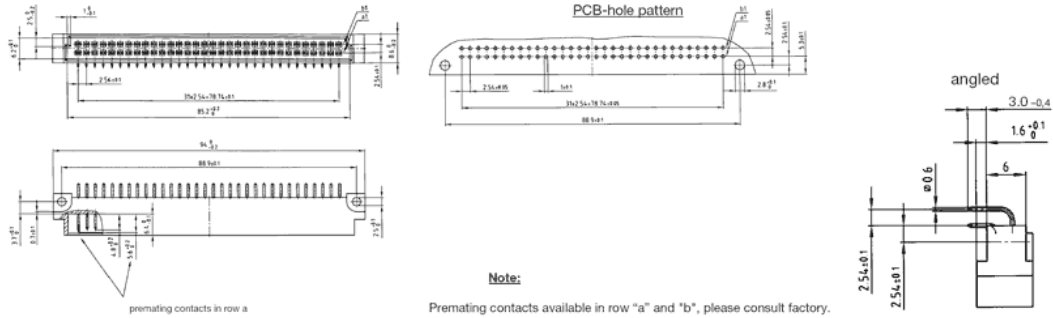

Note:

Premating contacts available in row "a" and "b", please consult factory.

Solder pin angled with clip



Part Numbers

No. of Pos.	• = contact + = no contact	angled	Solder pin	angled with clip
32	Pos. 1 2 3 4 5 ... row b + + + + + row a • • • • •	121 A 10019 X	121 A 10049 X	121 A 20819 X
32	Pos. 1 2 3 4 5 ... row b + • + • + • row a + • + • + •	121 A 10029 X	121 A 10059 X	121 A 20829 X
64	Pos. 1 2 3 4 5 ... row b • • • • • row a • • • • •	121 A 10039 X	121 A 10069 X	121 A 20839 X

Clip for PCB Ø 2.8 + 0.1 mm, PCB-thickness = 1.6 mm