




TOP VIEW

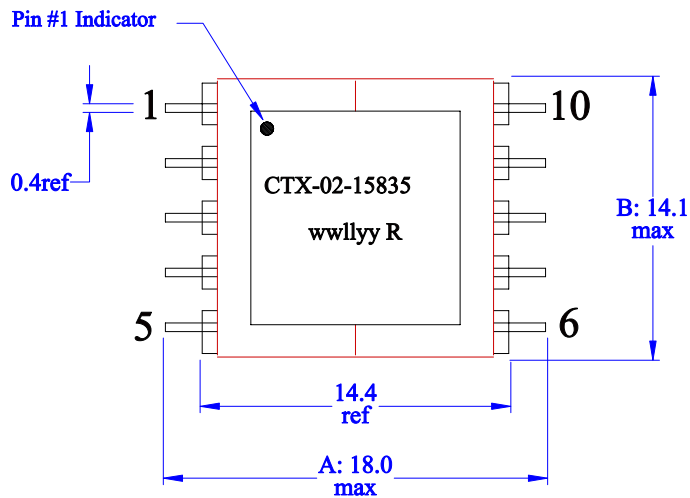

FRONT VIEW

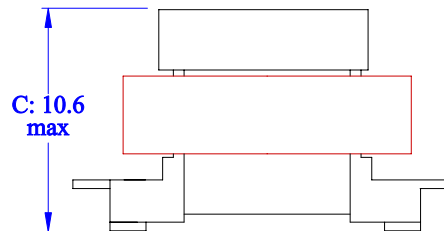

RECOMMENDED PCB LAYOUT

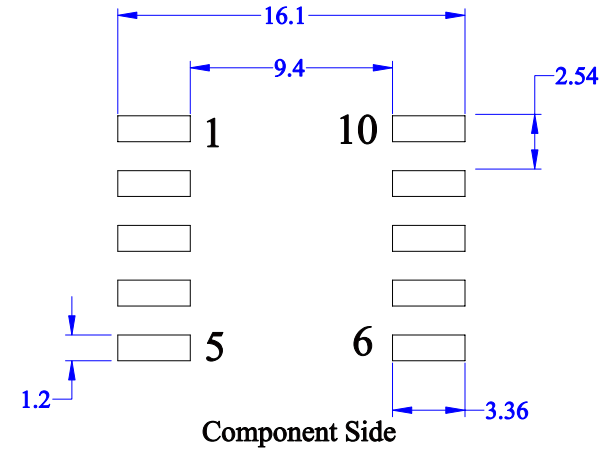

ELECTRICAL CHARACTERISTICS

OCL @ 100KHz, 0.10Vrms, 0.0Adc; pins (2 - 3). 375 - 625uH.

DCR @ 20 degrees C., pins (2 - 3). 0.25 Ohm maximum.

DCR @ 20 degrees C., pins (3 - 4).: 0.25 Ohms maximum.

DCR @ 20 degrees C., pins (9 - 8). 0.52 Ohm maximum.

DCR @ 20 degrees C., pins (8 - 7).: 0.52 Ohms maximum.


Turns ratio: pins (2 - 3) : (3 - 4) : (9 - 8) : (8 - 7). 1.0:1.0:1.4:1.4

HiPot @ 1500Vdc for 1 second; pins 2 to 9.

HiPot @ 600Vdc for 1 second; pins 2 & 9 to core.

SCL @ 100KHz, 0.10Vrms, 0.0Adc; pins (2 - 4) with (9-7) shorted 5.0 uh max

SCHEMATIC

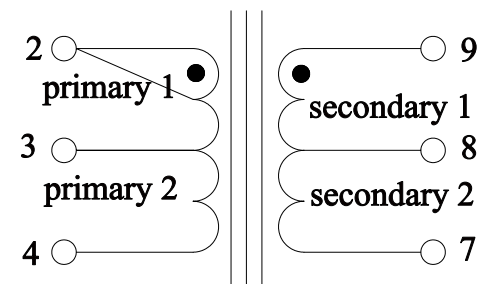

Notes:

- 1). All dimensions are in mm unless otherwise specified.
- 2). Tolerances are +/- 0.25 millimeters unless stated otherwise.
- 3). All soldering surfaces must be coplanar within 0.1524 millimeters.
- 4). Core wrapped with 2 layers of epoxy tape.
- 5). wwlllyy= Date Code, R= revision level
- 6). PCB tolerances are +/-0.1 millimeters unless stated otherwise.

COILTRONICS, INCORORATED

3601 Quantum Blvd, Boynton Beach, FL 33426

Transformer, push-pull, continuous
4.5 - 5.5Vdc(input) : 5Vdc @ 0.60A

100kHz, 500uH @ 0.72Adc(peak)
EE12.6, 10 Pin J-Lead, Horizontal, SMT

Size Drawing Number: CTX02-15835

A Revision Level: A Sheet 3 of 6

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Eaton:](#)

[CTX02-15835](#)