
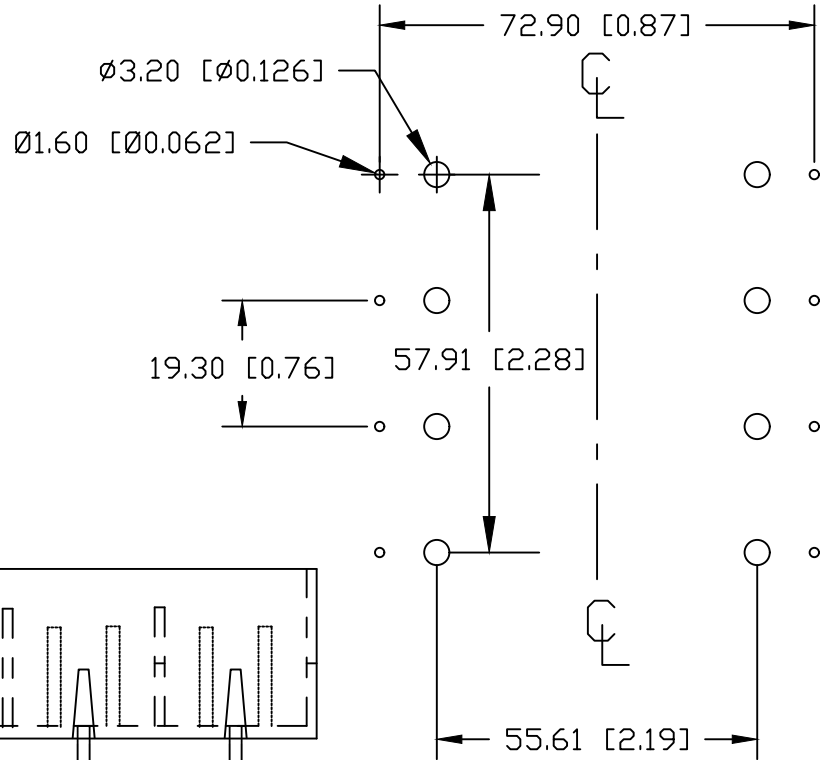
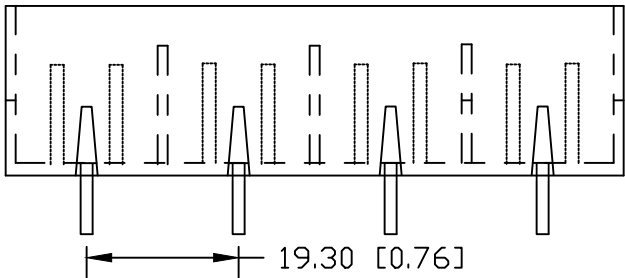


This battery holder is designed for use with protected 18650 batteries (PCB)


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
06/30/17	H	DIM. 3.20 WAS 3.02	T.B.	B.S.	
07/22/17	J	ADDED MOUNTING INSTRUCTION	T.B.	B.S.	
04/05/19	K	ADDED DIM. 72.90	T.B.	B.S.	
05/17/19	L	UPDATED NOTES	T.B.	B.S.	

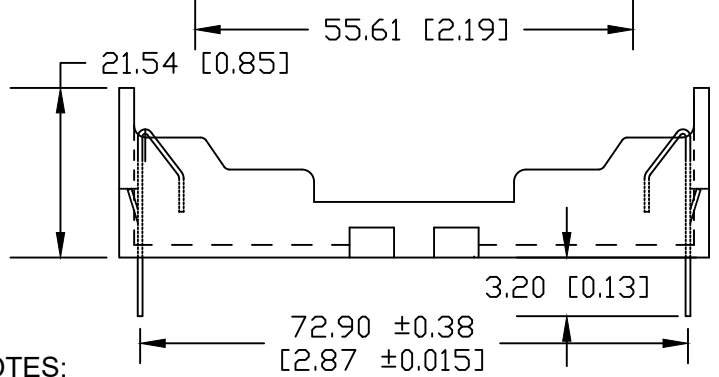

PCB LAYOUT

NOTES:
 Material: Self-extinguishing Thermoplastic Polyester, color black
 Temperature Range: -40°C to +180°C
 Contacts: 302 Stainless Steel Spring Temper, Nickel Plated
 Flammability Rating: UL 94V-0
 Dielectric Strength: 560 Volts/Mil. at 25°C for 5 Sec.
 Resistance to Solvents: Xylene, ethyl, butyl, methyl & toluene
 Weight: 35.58g.
 ROHS COMPLIANT

Mounting Instruction:
 Use 2-56 machine screws or eyelets 0.089" OD by 0.15" flange stimpson GS-3 series or equivalent. also adhesives and double sided tapes work well.

Tolerance (Inches)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ±.8 (.030)	Title FOUR 18650 LI-ION CELL HOLDER		
Angular ± 3°	Date 05/17/19	Drawing Number BK-18650-PC8	
		Approved By T.B.	