
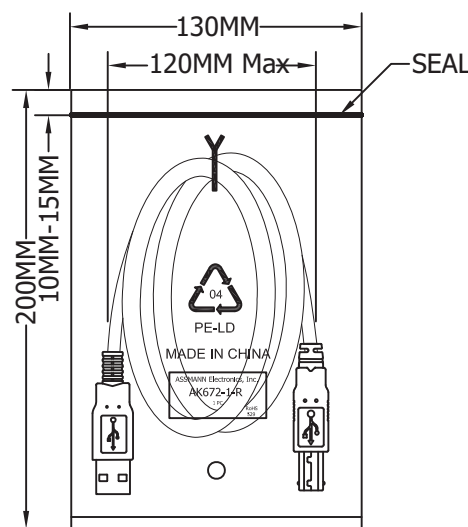


Material:

- Cable: USB2.0 Shielded E189529 UL2725 28#/1P+24#/2C+AEB
- OD 4.7MM
- Beige (IV-29#)
 - P1 Connector: USB2.0 A Male Shell
- Pin G/F
- 4PCS Type
- Insulator color: white
- Shell Plate Nickel
 - P2 Connector: USB2.0 B Male Shell
- Pin G/F
- 3PCS Type
- Insulator color: white
- Shell Plate Nickel
 - Outer Jacket: Beige (IV-29#) PVC-40P
 - 80°C 30V VW-1
- Electrical:**
- 100% short, open, miswire test
 - Conduct resistance: 2Ω Max.
 - Insulation resistance: 5MΩ Min.
 - Dielectric test: 300V DC

PIN Assignment:

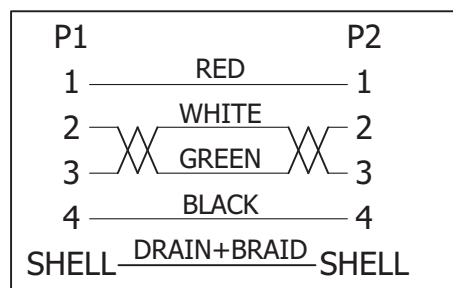

1PC / PE Bag

Scale	1:1					Name
TOLERANCE				Drawn	01.04.12	Chappell
X.X	±0.40					
X.XX	±0.25			Approved		
X.XXX	±0.15					
Angle	±3°					
		Modification	Date	Name		



Item No.	
AK672/2-2-R	
Title USB 2.0 Cable - A Male <=> B Male, Beige, 2 Meters	
Drawing No.	rev00
Replace	
Sheet	