




Thick Film Resistor/Capacitor Networks,  
Single-In-Line, Conformal Coated SIP  
Conformal Coating Optional

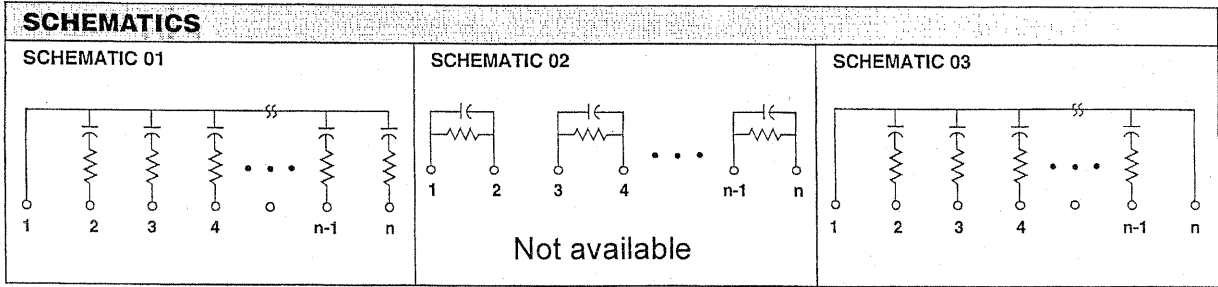

Note

**DIMENSIONS** in inches (millimeters)

NUMBER OF PINS	A (Max.)	B ± 0.005 (0.127)	C (Max.)
6	0.590 (14.99)	0.500 (12.70)	0.350 (8.89)
7	0.690 (17.53)	0.600 (15.24)	0.350 (8.89)
8	0.790 (20.07)	0.700 (17.78)	0.350 (8.89)
9	0.890 (22.61)	0.800 (20.32)	0.350 (8.89)
10	0.990 (25.15)	0.900 (22.86)	0.350 (8.89)

**STANDARD ELECTRICAL SPECIFICATIONS**

- Resistance Tolerance            +/- 1%
- Capacitance Tolerance        +/- 10%
- Capacitance Voltage            50V
- Power Rating at 70 Degree C    0.20 Watts

**FEATURES**

- Thick Film Resistors
- NPO or X7R Capacitors
- Operation Temp Range (-55 C to 125 C)
- RoHS Compliant