


PHYSICAL DIMENSIONS:

A	8.51	[.335]	+ 0.13	[.005]
B	10.03	[.395]	+ 0.15	[.006]
B ₁	11.05	[.435]	MAX	
C	9.32	[.367]	+ 0.15	[.006]
C ₁	10.49	[.413]	MAX.	
D	4.06	[.160]	+ 0.13	[.005]
E	2.54	[.100]	+ 0.13	[.005]


WIRE:

T ₁	3.56	[.140]	+ 0.25	[.010]
T ₂	0.76	[.030]	TYP.	
T ₃	0.76	[.030]	TYP.	



Z vs. FREQUENCY (C,O,N)

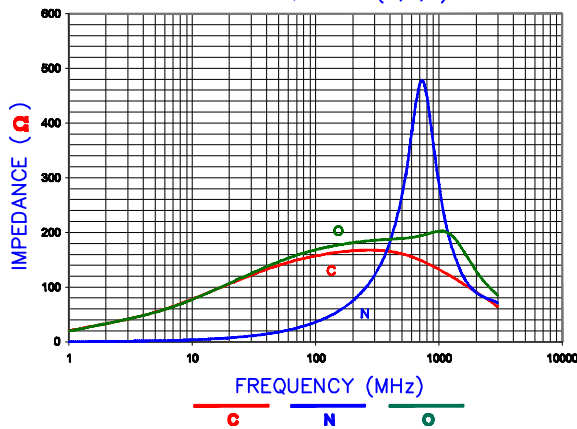

Z, R, XL vs. FREQUENCY

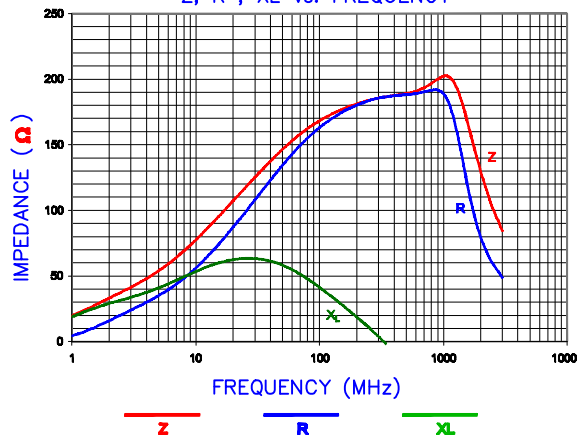

CM3440Z171R-10

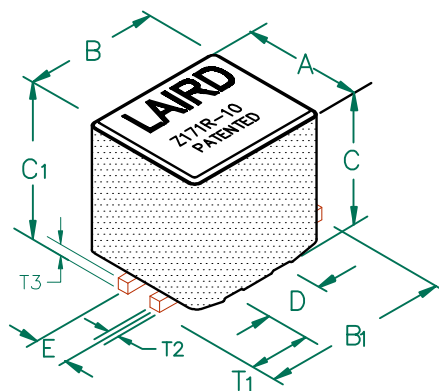

ELECTRICAL CHARACTERISTICS:

Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	170	
Minimum	128	
Maximum	-	0.001 20,000 mA



NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 13" REELS, 375 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. REF. CARRIER TAPE SPECIFICATION CART3440-6P.
4. TERMINATION FINISH IS 100% TIN.
5. THIS PART HAS NO PIN POLARITY.


UNCONTROLLED DOCUMENT

RECOMMENDED SOLDERING CONDITIONS

LAND PATTERNS FOR REFLOW SOLDERING

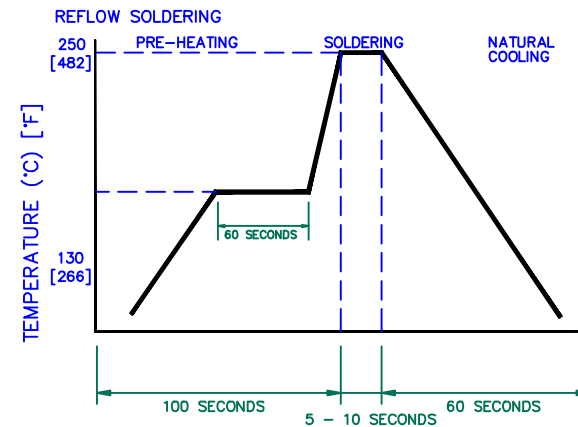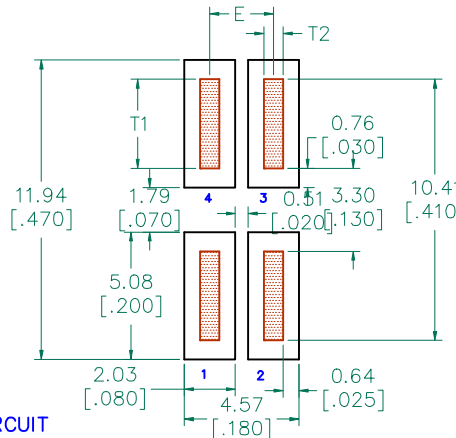

EQUIVALENT CIRCUIT



DIMENSIONS ARE IN mm (INCHES).				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
C	UPDATE COMPANY LOGO & KAPTON LABEL ADD EQUIVALENT CIRCUIT	11/18/08	JRK	PROJECT/PART NUMBER:	CM3440Z171R-10	REV	C
B	UPDATE COMPANY LOGO	11/28/07	JRK	DATE:	5/27/04	PART TYPE:	ASSEMBLY
A	ORIGINAL DRAFT	5/27/04	JRK	CAD #		SCALE:	NTS
REV	DESCRIPTION	DATE	INT	CM3440Z171R-10-C-2		SHEET:	2 of 3

