




CMPT3904 CMPT3904G* NPN
 CMPT3906 CMPT3906G* PNP

**COMPLEMENTARY
 SILICON TRANSISTORS**



SOT-23 CASE

* Device is **Halogen Free** by design

Central™

Semiconductor Corp.

DESCRIPTION:

These CENTRAL SEMICONDUCTOR devices are complementary silicon transistors manufactured by the epitaxial planar process, epoxy molded in a surface mount package, designed for small signal general purpose amplifier and switching applications.

MARKING CODES: CMPT3904: C1A
 CMPT3906: C2A
 CMPT3904G*: CG1
 CMPT3906G*: CG2

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Collector-Base Voltage
 Collector-Emitter Voltage
 Emitter-Base Voltage
 Continuous Collector Current
 Power Dissipation
 Operating and Storage Junction Temperature
 Thermal Resistance

SYMBOL	CMPT3904	CMPT3906	UNITS
	CMPT3904G*	CMPT3906G*	
V_{CBO}	60	40	V
V_{CEO}	40	40	V
V_{EBO}	6.0	5.0	V
I_C		200	mA
P_D		350	mW
T_J, T_{stg}		-65 to +150	$^\circ\text{C}$
θ_{JA}		357	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$)

SYMBOL	TEST CONDITIONS
I_{CEV}	$V_{CE}=30\text{V}, V_{EB}=3.0\text{V}$
I_{BL}	$V_{CE}=30\text{V}, V_{EB}=3.0\text{V}$
BV_{CBO}	$I_C=10\mu\text{A}$
BV_{CEO}	$I_C=1.0\text{mA}$
BV_{EBO}	$I_E=10\mu\text{A}$
$V_{CE(SAT)}$	$I_C=10\text{mA}, I_B=1.0\text{mA}$
$V_{CE(SAT)}$	$I_C=50\text{mA}, I_B=5.0\text{mA}$
$V_{BE(SAT)}$	$I_C=10\text{mA}, I_B=1.0\text{mA}$
$V_{BE(SAT)}$	$I_C=50\text{mA}, I_B=5.0\text{mA}$
h_{FE}	$V_{CE}=1.0\text{V}, I_C=0.1\text{mA}$
h_{FE}	$V_{CE}=1.0\text{V}, I_C=1.0\text{mA}$
h_{FE}	$V_{CE}=1.0\text{V}, I_C=10\text{mA}$
h_{FE}	$V_{CE}=1.0\text{V}, I_C=50\text{mA}$
h_{FE}	$V_{CE}=1.0\text{V}, I_C=100\text{mA}$


SYMBOL	CMPT3904 CMPT3904G*		CMPT3906 CMPT3906G*		UNITS
	MIN	MAX	MIN	MAX	
I_{CEV}	-	50	-	50	nA
I_{BL}	-	50	-	50	nA
BV_{CBO}	60	-	40	-	V
BV_{CEO}	40	-	40	-	V
BV_{EBO}	6.0	-	5.0	-	V
$V_{CE(SAT)}$	-	0.20	-	0.25	V
$V_{CE(SAT)}$	-	0.30	-	0.40	V
$V_{BE(SAT)}$	0.65	0.85	0.65	0.85	V
$V_{BE(SAT)}$	-	0.95	-	0.95	V
h_{FE}	40	-	60	-	
h_{FE}	70	-	80	-	
h_{FE}	100	300	100	300	
h_{FE}	60	-	60	-	
h_{FE}	30	-	30	-	

**COMPLEMENTARY
 SILICON TRANSISTORS**

ELECTRICAL CHARACTERISTICS Continued: ($T_A=25^\circ\text{C}$)

SYMBOL	TEST CONDITIONS	CMPT3904 CMPT3904G*		CMPT3906 CMPT3906G*		UNITS
		MIN	MAX	MIN	MAX	
f_T	$V_{CE}=20\text{V}$, $I_C=10\text{mA}$, $f=100\text{MHz}$	300	-	250	-	MHz
C_{ob}	$V_{CB}=5.0\text{V}$, $I_E=0$, $f=1.0\text{MHz}$	-	4.0	-	4.5	pF
C_{ib}	$V_{BE}=0.5\text{V}$, $I_C=0$, $f=1.0\text{MHz}$	-	8.0	-	10	pF
h_{ie}	$V_{CE}=10\text{V}$, $I_C=1.0\text{mA}$, $f=1.0\text{kHz}$	1.0	10	2.0	12	$k\Omega$
h_{re}	$V_{CE}=10\text{V}$, $I_C=1.0\text{mA}$, $f=1.0\text{kHz}$	0.5	8.0	0.1	10	$\times 10^{-4}$
h_{fe}	$V_{CE}=10\text{V}$, $I_C=1.0\text{mA}$, $f=1.0\text{kHz}$	100	400	100	400	
h_{oe}	$V_{CE}=10\text{V}$, $I_C=1.0\text{mA}$, $f=1.0\text{kHz}$	1.0	40	3.0	60	μS
NF	$V_{CE}=5.0\text{V}$, $I_C=100\mu\text{A}$, $R_S=1.0k\Omega$ $f=10\text{Hz}$ to 15.7kHz	-	5.0	-	4.0	dB
t_d	$V_{CC}=3.0\text{V}$, $V_{BE}=0.5$, $I_C=10\text{mA}$, $I_{B1}=1.0\text{mA}$	-	35	-	35	ns
t_r	$V_{CC}=3.0\text{V}$, $V_{BE}=0.5$, $I_C=10\text{mA}$, $I_{B1}=1.0\text{mA}$	-	35	-	35	ns
t_s	$V_{CC}=3.0\text{V}$, $I_C=10\text{mA}$, $I_{B1}=I_{B2}=1.0\text{mA}$	-	200	-	225	ns
t_f	$V_{CC}=3.0\text{V}$, $I_C=10\text{mA}$, $I_{B1}=I_{B2}=1.0\text{mA}$	-	50	-	75	ns

SOT-23 CASE - MECHANICAL OUTLINE

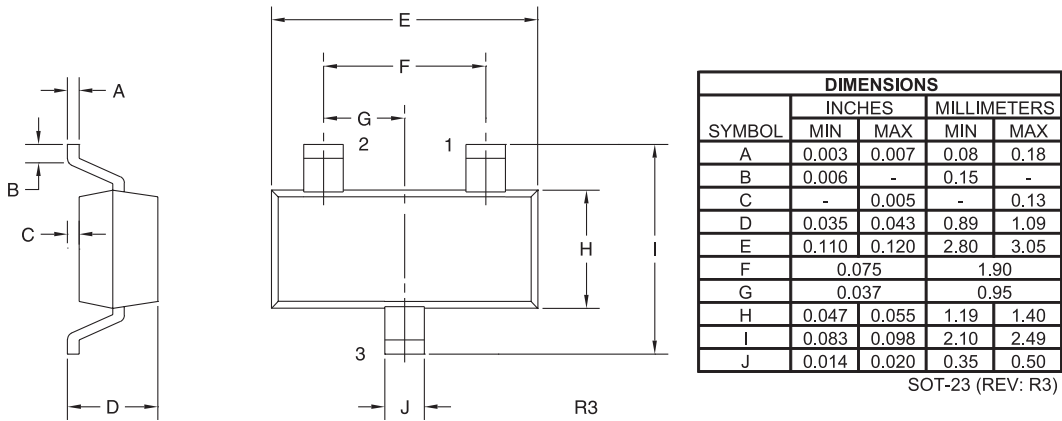

LEAD CODE:
 1) BASE
 2) EMITTER
 3) COLLECTOR

MARKING CODES: CMPT3904: C1A
 CMPT3906: C2A
 CMPT3904G*: CG1
 CMPT3906G*: CG2

* Device is **Halogen Free** by design