



DIGIT DETAIL

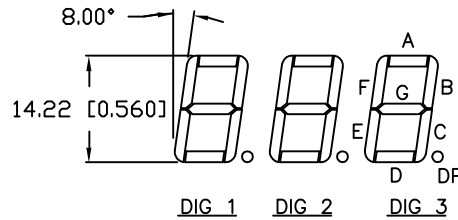

COMMON ANODE

DIG1: PIN NO. 3,26  
DIG2: PIN NO. 19  
DIG3: PIN NO. 18

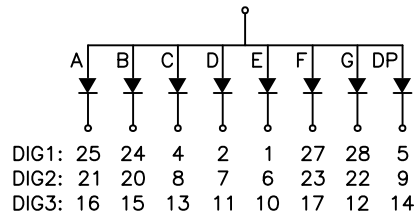

ELECTRO-OPTICAL CHARACTERISTICS  $T_A=25^{\circ}\text{C}$   $I_f=20\text{mA}$

| PARAMETER          | MIN                  | TYP       | MAX | UNITS    | TEST COND            |
|--------------------|----------------------|-----------|-----|----------|----------------------|
| PEAK WAVELENGTH    |                      | 635 (RED) |     | nm       |                      |
| FORWARD VOLTAGE    |                      | 2.0       | 2.5 | $V_f$    |                      |
| REVERSE VOLTAGE    | 5.0                  |           |     | $V_r$    | $I_r=100\mu\text{A}$ |
| AXIAL INTENSITY    |                      | 3900      |     | mcd      | $I_f=20\text{mA}$    |
| VIEWING ANGLE      |                      | 60        |     | 2x theta |                      |
| EMITTED COLOR:     | RED                  |           |     |          |                      |
| EPOXY LENS FINISH: | MILKY WHITE DIFFUSED |           |     |          |                      |

LIMITS OF SAFE OPERATION AT 25°C PER DIE

| PARAMETER                | MAX        | UNITS      |
|--------------------------|------------|------------|
| PEAK FORWARD CURRENT*    | 150        | mA         |
| STEADY CURRENT           | 30         | mA         |
| POWER DISSIPATION        | 105        | mW         |
| DERATE FROM 25°C         | -1.2       | mW/°C      |
| OPERATING, STORAGE TEMP. | -40 TO +85 | °C         |
| SOLDERING TEMP.          | +260       | °C         |
| 2.0mm FROM BODY          |            | 3 SEC. MAX |

\*  $t < 10\mu\text{s}$

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION MAX.= +0.00 -DECIMAL PRECISION



|   |                           |
|---|---------------------------|
| REV.  | PART NUMBER<br>LDT-A514RI |
| 0.56" TRIPLE DIGIT, SEVEN SEGMENT DISPLAY, 635nm RED, GREY FONT/WHITE SEGMENTS. COMMON ANODE. |                           |

**CONFIDENTIAL INFORMATION**  
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

**RELIABILITY NOTE**  
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

|                 |             |   |   |
|-----------------|-------------|---|---|
|                 |             | 290 E. HELEN ROAD<br>PALATINE, IL 60067-6976<br>PHONE: +1.847.359.2790<br>US WEB: www.lumex.com<br>TW WEB: www.lumex.com.tw |   |
| DRAWN BY:<br>DU | CHECKED BY: | APPROVED BY:  | DATE: 1.27.98<br>PAGE: 1 OF 1<br>SCALE: N/A |