


Metal Film Resistors

MFR Type

Normal & Miniature Style [MFR Series]

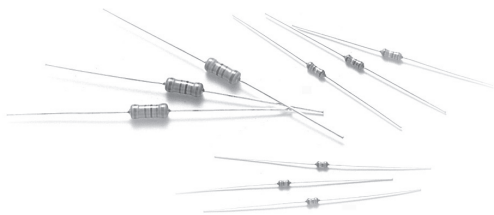

INTRODUCTION


The MFR Series Metal Film Resistors are manufactured using vacuum sputtering system to deposit multiple layers of mixed metals alloy and passivative materials onto a carefully treated high grade ceramic substrate. After a helical groove has been cut in the resistive layer, tinned connecting leads of electrolytic copper are welded to the end-caps. The resistors are coated with layers of blue color lacquer.

FEATURES

Power Rating	1/6W, 1/4W, 1/2W, 1W, 2W, 3W
Resistance Tolerance	±0.5%, ±1%
T.C.R.	±15ppm/°C, ±25ppm/°C, ±50ppm/°C, ±100ppm/°C


DERATING CURVE

For resistors operated in ambient temperatures above 70°C, power rating must be derated in accordance with the curve below.

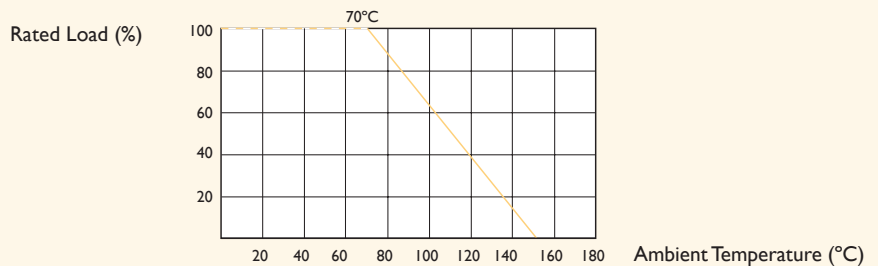

DIMENSIONS

Unit : mm

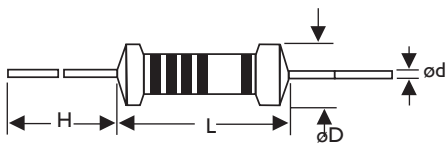

STYLE		DIMENSION			
Normal	Miniature	L	øD	H	ød
MFR-12	MFR25S	3.4±0.3	1.9±0.2	28±2.0	0.45±0.05
MFR-25	MFR50S	6.3±0.5	2.4±0.2	28±2.0	0.55±0.05
MFR-50	MFR1WS	9.0±0.5	3.3±0.3	26±2.0	0.55±0.05
MFR100	MFR2WS	11.5±1.0	4.5±0.5	35±2.0	0.8±0.05
MFR200	MFR3WS	15.5±1.0	5.0±0.5	33±2.0	0.8±0.05



Note :

ELECTRICAL CHARACTERISTICS

STYLE	MFR-12	MFR25S	MFR-25	MFR50S	MFR-50	MFR1WS	MFR100	MFR2WS	MFR200	MFR3WS
Power Rating at 70°C	1/6W	1/4W		1/2W		1W		2W		3W
Maximum Working Voltage	200V		250V	300V	350V	400V	500V			
Maximum Overload Voltage	400V		500V	600V	700V	800V	1000V			
Dielectric Withstanding Voltage	300V	400V	500V			700V	1000V			
Resistance Range	1 Ω ~ 10MΩ & 0Ω for E24 & E96 series value									
Operating Temp. Range	- 55°C to + 155°C									
Temperature Coefficient	±15ppm/°C, ±25ppm/°C, ±50ppm/°C, ±100ppm/°C									

* Below or over this resistance range on request.

ENVIRONMENTAL CHARACTERISTICS

PERFORMANCE TEST	TEST METHOD		APPRAISE
Short Time Overload	JIS-C-5202 5.5	2.5 Times RCWV for 5 Seconds	±(0.25%+0.05 Ω)
Dielectric Withstanding Voltage	JIS-C-5202 5.7	in V-Block for 60 Seconds	by Type
Temperature Coefficient	JIS-C-5202 5.2	-55°C to +155°C	by Type
Insulation Resistance	JIS-C-5202 5.6	in V-Block	> 10000MΩ
Solderability	JIS-C-5202 6.5	260°C ±5°C for 5 ±0.5 Seconds	95% Min. Coverage
Resistance to Solvent	JIS-C-5202 6.9	IPA for 1 Min. with Ultrasonic	No deterioration of Coatings and Markings
Terminal Strength	JIS-C-5202 6.1	Direct load for 10 Sec. In the Direction of the Terminal Leads	≥2.5kg (24.5N)
Pulse Overload	JIS-C-5202 5.8	4 Times RCWV 10000 Cycles (1 Sec. On, 25 Sec. off)	±1.0%+0.05 Ω
Load Life in Humidity	JIS-C-5202 7.9	40±2°C , 90~95% RH at RCWV for 1,000 Hrs. (1.5 Hrs. on , 0.5 Hrs. off)	±1.5%+0.05 Ω
Load Life	JIS-C-5202 7.10	70°C at RCWV for 1,000 Hrs. (1.5 Hrs. on 0.5 Hrs. off)	±1.5%+0.05 Ω
Temperature Cycling	JIS-C-5202 7.4	-55°C→Room Temp.→+155°C→Room Temp. for 5 Cycles	±0.75%+0.05 Ω
Resistance to Soldering Heat	JIS-C-5202 6.4	350°C ±10°C for 3±0.5 Seconds	±0.25%+0.05 Ω

* Rated Continuous Working Voltage (RCWV)= $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$