





**Specification Status: Released**


**Electrical Rating**

**Voltage: 60V MAX**  
**Current: 40A MAX**

Insulating Material:  
Cured, Flame Retardant Epoxy Polymer

Lead Material:  
20 AWG Tin Plated Copper

Marking:  
 Manufacturer's Mark and Voltage  
 60  
 KF400  
 Lot Identification (can be on back)

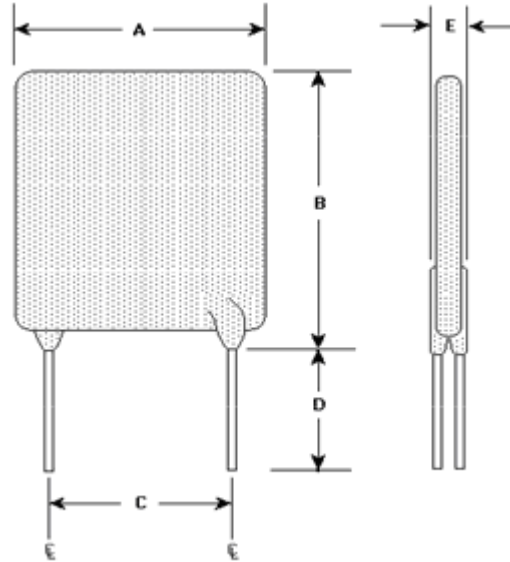

**TABLE I. DIMENSIONS:**

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	21.0	--	24.9	9.4	10.9	7.6	--	--	3.0
in*:	--	(0.83)	--	(0.98)	(0.37)	(0.43)	(0.3)	--	--	(0.12)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS :**

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED-STATE POWER DISSIPATION
AMPERES AT 20°C HOLD	AMPERES AT 20°C HOLD	AMPERES AT 20°C TRIP	OHMS AT 20°C		SECONDS AT 20°C, 20A MAX	OHMS AT 20°C MAX	WATTS AT 20°C NOMINAL
			MIN	MAX			
4	4	8	0.014	0.038	24	0.06	3.7

Agency Recognitions: UL, TUV, CSA  
 Reference Documents: PS300  
 Precedence: This specification takes precedence over documents referenced herein.  
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.  
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

**Materials Information**

ROHS Compliant      ELV Compliant      Pb-Free

Directive 2002/95/EC Compliant

Directive 2000/53/EC Compliant

