



- Features:
- High performance for low cost
  - Complete welded terminations
  - Tinned copper leads
  - High temperature silicone coating
  - RoHS compliant / lead-free
  - UL 1412 file E344795
  - Additional non-UL certified values of this part also available; contact Stackpole for details



Electrical Specifications				
Type / Code	Dielectric Strength (V)	Power Rating (Watts) @ 25°C	Resistance Temperature Coefficient	Ohmic Values (Ω) and Tolerance
				5%
SP3A	1,000V	4W	± 20ppm	10 - 100

SP3A Fusing Time:

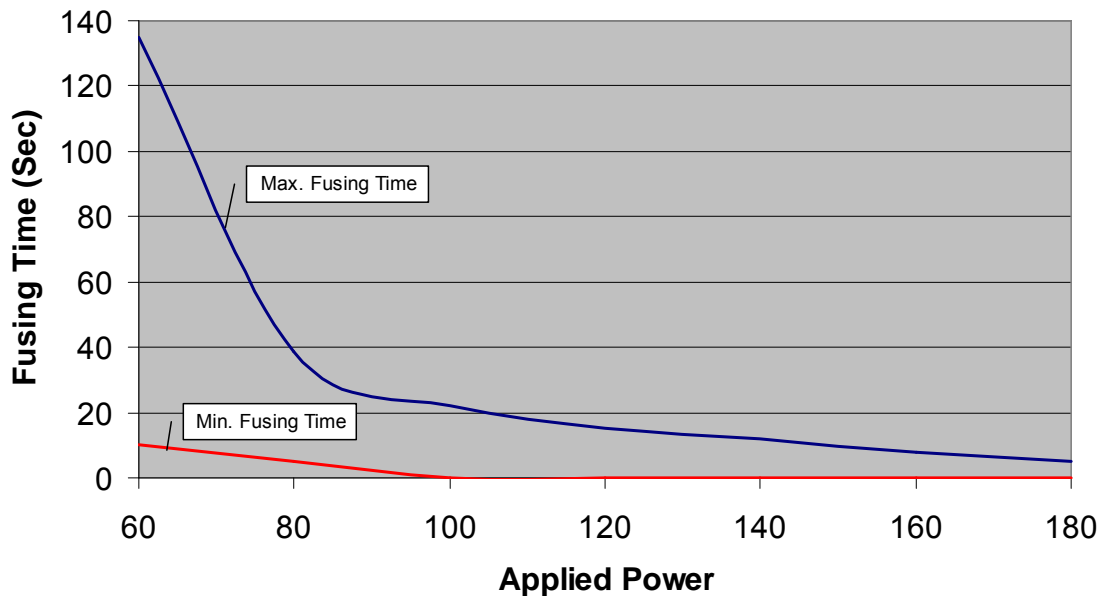

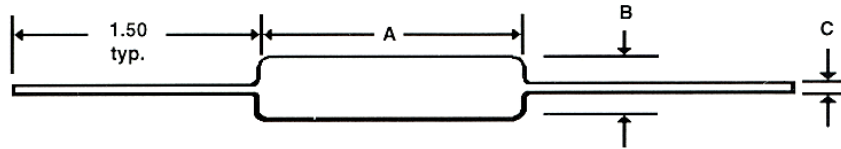

Mechanical Specifications				
Type / Code	A	B	C	Units
SP3A	0.5 ± 0.062	0.218 ± 0.031	0.032 ± 0.002	inches
	12.7 ± 1.6	5.5 ± 0.8	0.81 ± 0.05	mm

**How to Order**

1	2	3	4	5	6	7	8	9	10
S	P	3	A	J	T	1	0	0	R

Product Series	Tolerance		Packaging				Resistance Value
SP3A	Code	Tol	Code	Description	Size	Quantity	Four characters with the "R" multiplier used as the decimal holder 10 ohm = 10R0 100 ohm = 100R
	J	5%	T	11" Reel Tape	SP3A	500	