

Is Now Part of



# **ON Semiconductor**®

# To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="https://www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to <a href="https://www.onsemi.com">Fairchild\_questions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized applications, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an equif prese

March 2014



# FSA4157, FSA4157A Low-Voltage, 1 $\Omega$ SPDT Analog Switch

### Features

- FSA4157A Features Lower I<sub>CC</sub> when the S Input is Lower Than V<sub>CC</sub>
- Maximum 1.15 Ω On Resistance (R<sub>ON</sub>) at 4.5 V V<sub>CC</sub>
- 0.3 Ω Maximum R<sub>ON</sub> Flatness at 4.5 V V<sub>CC</sub>
- Space-Saving 6-lead, MicroPak<sup>™</sup> and SC70 6 Packages
- Broad V<sub>CC</sub> Operating Range:
  FSA4157: 1.65 V to 5.5 V
  FSA4157A: 2.7 V to 5.5 V
- Fast Turn-On and Turn-Off Time
- Break-Before-Make Enable Circuitry
- Over-Voltage Tolerant TTL-Compatible Control Circuitry

### Description

FSA4157 and FSA4157A are high performance Single Pole/Double Throw (SPDT) analog switches. Both devices feature ultra low  $R_{ON}$  of  $1.15 \Omega$  maximum at  $4.5 V V_{CC}$  and operates over the wide  $V_{CC}$  range of 1.65 V to 5.5 V for FSA4157, and 2.7 V to 5.5 V for FSA4157A. The device is fabricated with sub-micron CMOS technology to achieve fast switching speeds and is designed for break-before-make operation. The select input is TTL level compatible.

The FSA4157A features very low quiescent current even when the control voltage is lower than the  $V_{CC}$  supply. This feature services the mobile handset applications very well allowing for the direct interface with baseband processor general purpose I/Os.

Part Number	Top Mark	Package Description	Packing Method
FSA4157P6X	A57	6-Lead SC70, EIAJ SC88, 1.25 mm Wide	3000 Units Tape and Reel
FSA4157L6X	EG	6-Lead MicroPak,™ 1.0 mm Wide	5000 Units Tape and Reel
FSA4157AP6X	B57	6-Lead SC70, EIAJ SC88, 1.25 mm Wide	3000 Units Tape and Reel
FSA4157AL6X	EU	6-Lead MicroPak™, 1.0 mm Wide	5000 Units Tape and Reel

### **Ordering Information**

# FSA4157, FSA4157A — Low-Voltage, 1 Ω SPDT Analog Switch

# **Pin Configurations**




Figure 1. SC70 Pin Assignments




Figure 2. MicroPak<sup>™</sup> Pin Assignments

### **Pin Definitions**

Pin# SC70	Pin# MicroPak™	Name	Description
1	6	B1	Data Ports
2	5	GND	Ground
3	4	B0	Data Ports
4	3	А	Data Ports
5	2	V <sub>cc</sub>	Supply Voltage
6	1	S	Control Input

# Truth Table

Control Input (S)	Function
Low	B0 connected to A
High	B1 connected to A

### **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Paramete	er	Min.	Max.	Unit	
V <sub>cc</sub>	Supply Voltage		-0.5	6.0	V	
Vs	DC Switch Voltage <sup>(1)</sup>		-0.5	V <sub>CC</sub> + 0.5	V	
V <sub>IN</sub>	DC Input Voltage <sup>(1)</sup>		-0.5	6.0	V	
I <sub>IK</sub>	DC Input Diode Current	-50		mA		
I <sub>SW</sub>	Switch Current		200	mA		
I <sub>SWPEAK</sub>	Peak Switch Current (Pulse at 1 ms du		400	mA		
Б	Dower Dissinction of 95%	SC70		190	m\//	
P <sub>D</sub>	Power Dissipation at 85°C	MicroPak™		180	mW	
T <sub>STG</sub>	Storage Temperature Range		-65	+150	°C	
TJ	Maximum Junction Temperature			+150	°C	
TL	Lead Temperature (Soldering, 10 seco		+260	°C		
ESD	Electrostatic Discharge Capability	Human Body Model, JESD22-A114 (FSA4157A)		7500	V	

Note:

1. Input and output negative ratings may be exceeded if input and output diode current ratings are observed.

### **Recommended Operating Conditions**

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

Symbol	Parameter	Min.	Max.	Unit	
N/		FSA4157	1.65	5.50	V
V <sub>cc</sub>	Supply Voltage	FSA4157A	2.7	5.5	V
V <sub>CNTRL</sub>	Control Input Voltage <sup>(2)</sup>	0	V <sub>CC</sub>	V	
V <sub>SW</sub>	Switch Input Voltage	0	V <sub>cc</sub>	V	
T <sub>A</sub>	Operating Temperature	Operating Temperature			°C
0	Thermal Resistance in Still Air	SC70		350	°C/W
$\theta_{JA}$		MicroPak™ (Estimated)		330	0/00

Note:

2. Control input must be held HIGH or LOW and it must not float.

## **DC Electrical Characteristics**

Typical values are at 25°C unless otherwise specified.

					Ambier	nt Temp	erature		Unit
Symbol	Parameter	Conditions	V <sub>cc</sub> (V)		-25°		-40 to	+85°C	
				Min.	Тур.	Max.	Min.	Max.	
		FSA4157 Only	1.8 to 2.7				1.0		
V <sub>IH</sub>	Input Voltage High		2.7 to 3.6				2.0		V
			4.5 to 5.5				2.4		
		FSA4157 Only	1.8 to 2.7					0.4	
V		FSA4157A Only	2.7 to 3.6					0.4	V
V <sub>IL</sub> Input Voltage Low		2.7 to 3.6					0.6	V	
			4.5 to 5.5					0.8	
	Control Input	V <sub>IN</sub> =0 V to V <sub>CC</sub>	2.7 to 3.6				-1.0	1.0	μA
I <sub>IN</sub>	Leakage	V <sub>IN</sub> =0 V to V <sub>CC</sub>	4.5 to 5.5				-1.0	1.0	μΑ
I <sub>NO(OFF)</sub> , I <sub>NC(OFF)</sub>	Off Leakage Current of Port B0 and B1	A=1 V, 4.5 V, B <sub>0</sub> or B <sub>1</sub> =4.5, 1 V	5.5		±2		-20	20	nA
I <sub>A(ON)</sub>	On Leakage Current of Port A	A=1 V, 4.5v, $B_0$ or B <sub>1</sub> =4.5, 1 V,4.5 V or Floating	5.5		±4		-40	40	nA
R <sub>ON</sub>	Switch On	I <sub>OUT</sub> =100 mA, B <sub>0</sub> or B <sub>1</sub> =1.5 V	2.7		2.6	4.0		4.3	Ω
NON	Resistance	$I_{OUT}$ =100mA, B <sub>0</sub> or B <sub>1</sub> =3.5V	4.5		0.95	1.15		1.30	52
$\Delta R_{ON}$	On Resistance Matching Between Channels <sup>(4)</sup>	$I_{OUT}$ =100 mA, B <sub>0</sub> or B <sub>1</sub> =1.5 V	4.5		0.06	0.12		0.15	Ω
		I <sub>OUT</sub> =100 mA, B <sub>0</sub> or B <sub>I</sub> =0 V, 0.75 V,1.5 V	2.7		1.4				
R <sub>flat(on)</sub>	On Resistance Flatness <sup>(4)</sup>	I <sub>OUT</sub> =100 mA, B <sub>0</sub> or B <sub>1</sub> =0 V, 1 V, 2 V	4.5		0.2	0.3		0.4	Ω
	Quiescent Supply	V <sub>IN</sub> =0 V or V <sub>CC</sub> ,	3.6		0.1	0.5		1.0	
I <sub>CC</sub>	Current		5.5		0.1	0.5		1.0	μA
$\Delta I_{CC}$	Increase in I <sub>CC</sub> per Input	One Input at 2.7 V, others at V <sub>CC</sub> or GND (FSA4157A Only)	4.3		0.2			10.0	μA

FSA4157, FSA4157A — Low-Voltage, 1 Ω SPDT Analog Switch

Notes:

Measured by the voltage drop between the A and B pins at the indicated current through the switch. On 3. resistance is determined by the lower of the voltage on the two (A or B ports).

4.

 $\Delta R_{ON} = R_{ON max} - R_{ON min}$  measured at identical V<sub>CC</sub>, temperature, and voltage. Flatness is defined as the difference between the maximum and minimum value of on resistance over the 5. specified range of conditions.


# **AC Electrical Characteristics**


Typical values are at 25°C unless otherwise specified.


				Ambient Temperature					11		
Symbol	Parameter	Conditions	V <sub>cc</sub> (V)	-25°			-40 to +85°C		Unit	Figure	
				Min.	Тур.	Max.	Min.	Max.			
		$\begin{array}{l} B_0 \text{ or } B_1 {=} 1.5 \text{ V}, \\ R_L {=} 50 \ \Omega, \ C_L {=} 35 \text{ pF} \\ (FSA4157A Only) \end{array}$	2.7 to 3.6			60		65	ns Figure		
t <sub>ON</sub>	Turn-On Time	$B_0$ or $B_1=1.5V$ , $R_L=50\Omega$ , $C_L=35pF$	2.7 to 3.6			50		60		Figure 8	
		$B_0$ or $B_1$ =1.5 V, R <sub>L</sub> =50 Ω, C <sub>L</sub> =35pF	4.5 to 5.5			35		40			
4	Turn-Off Time	B <sub>0</sub> or B <sub>1</sub> =1.5 V, R <sub>L</sub> =50 Ω, C <sub>L</sub> =35 pF	2.7 to 3.6			20		30		Figure 8	
t <sub>OFF</sub> .		Time	$B_0$ or $B_1$ =1.5 V, R <sub>L</sub> =50 Ω, C <sub>L</sub> =35 pF	4.5 to 5.5			15		20	ns	Figure o
	Break- Before-	Break-	FSA4157	2.7 to 3.6							
t <sub>BBM</sub>		efore-	4.5 to 5.5		20				ns	Figure 9	
	Make Time	FSA4157A Only	4.5 to 5.5		25						
Q	Charge	C <sub>L</sub> =1.0 nF,	2.7 to 3.6		10				рС	Figure 1	
Q	Injection	$V_{GE}$ =0 V, R <sub>GEN</sub> =0 $\Omega$	4.5 to 5.5		20				pe	i igule i	
OIRR	Off Isolation	f=1 MHz, R <sub>L</sub> =50 Ω	2.7 to 3.6		-70				dB	Figure 10	
OINN	On isolation	1=1 WI12, IXL=30 32	4.5 to 5.5		-70				uD.	Tigure it	
N/2 11			2.7 to 3.6		-70				dB	Figure 10	
Xtalk	Crosstalk	Crosstalk f=1 MHz, $R_L$ =50 $\Omega$	4.5 to 5.5		-70						
-3d	-3db	<b>D</b> 50 0	2.7 to 3.6			300					
BW	Bandwidth	$R_L=50 \Omega$	4.5 to 5.5			300			MHz	Figure 13	
THD Hai	Total Harmon	R <sub>L</sub> =600 Ω, V <sub>IN</sub> =0.5,	2.7 to 3.6		0.002				%	Figure 14	
	Distortion	f=20 Hz to 20 kHz	4.5 to 5.5		0.002				,0	, iguio i	


# Capacitance


Symbol	Parameter	Conditions	V <sub>cc</sub> (V)	Ambient Temperature -25°			Unit	Figure	
				Min.	Тур.	Max.		$\mathbf{D}$	
C <sub>IN</sub>	Control Pin Input Capacitance	f=1 MHz	0		3.5		pF	Figure 12	
$C_{OFF}$	B Port Off Capacitance	f=1 MHz	4.5		12.0		pF	Figure 12	
C <sub>ON</sub>	On Capacitance	f=1 MHz	4.5		40.0		pF	Figure 12	

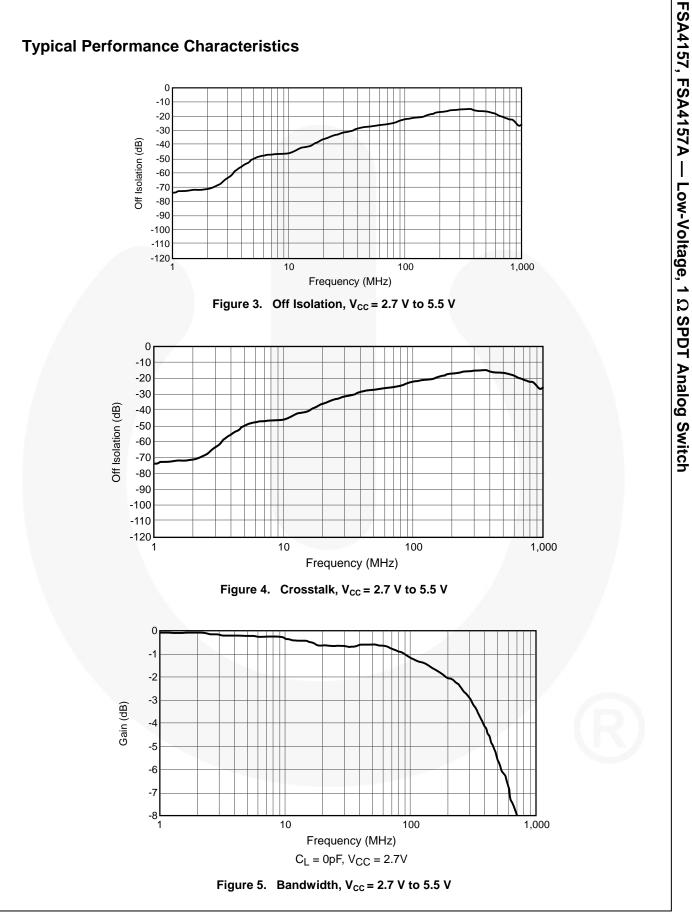


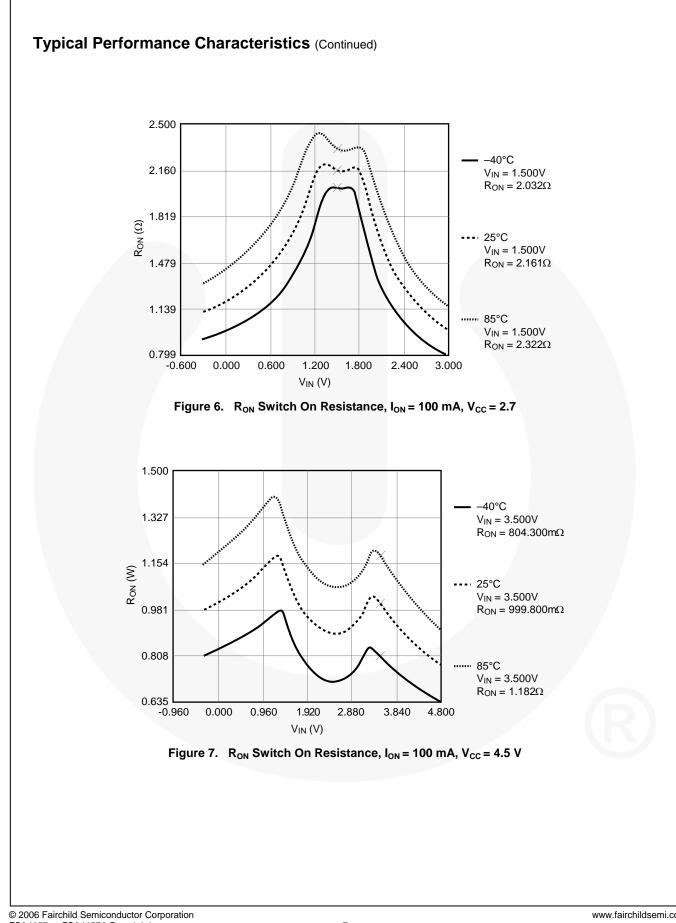

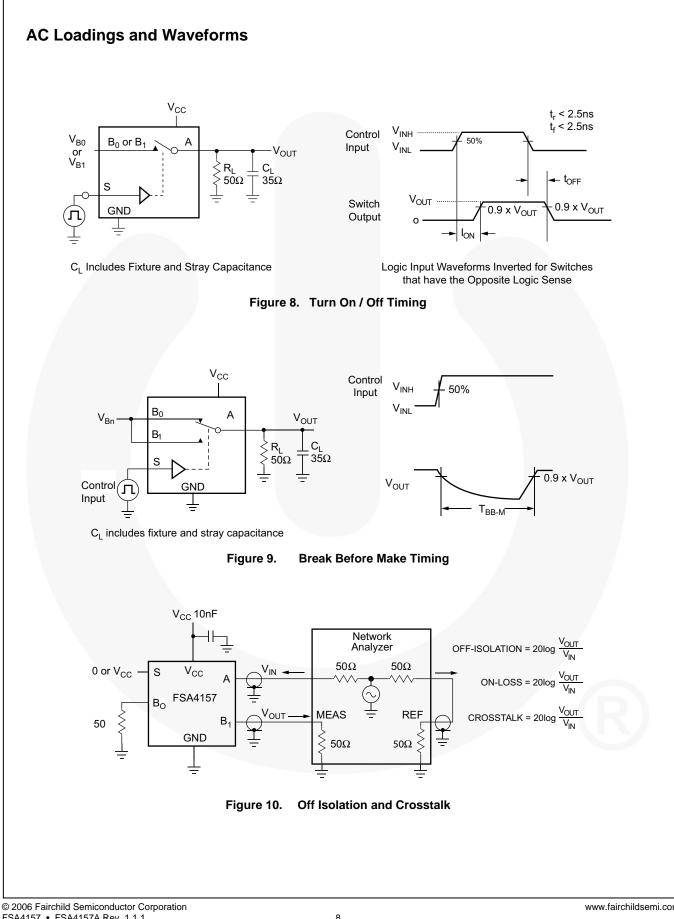

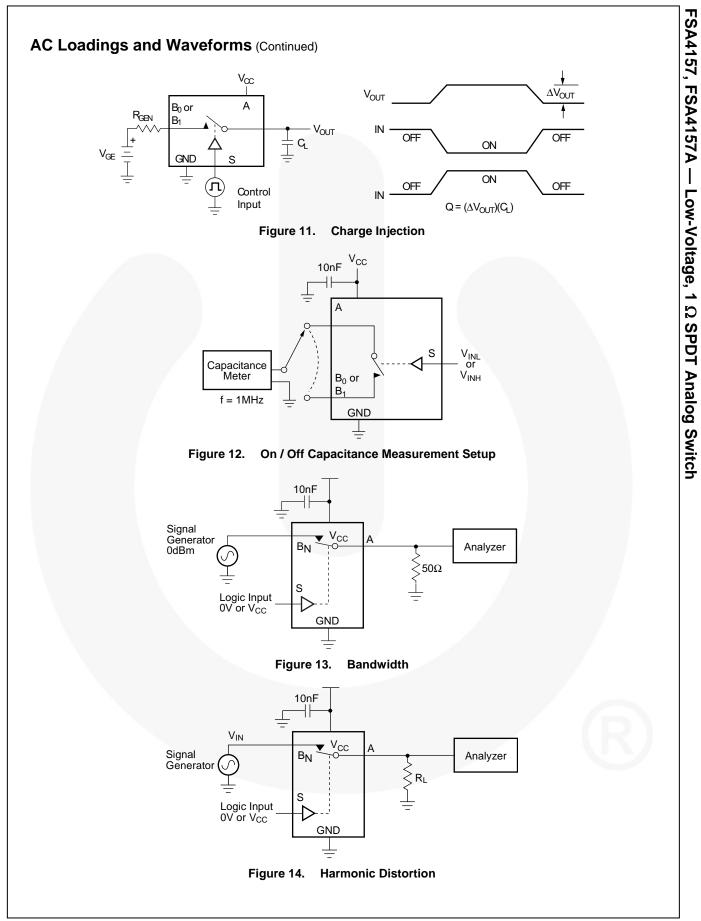

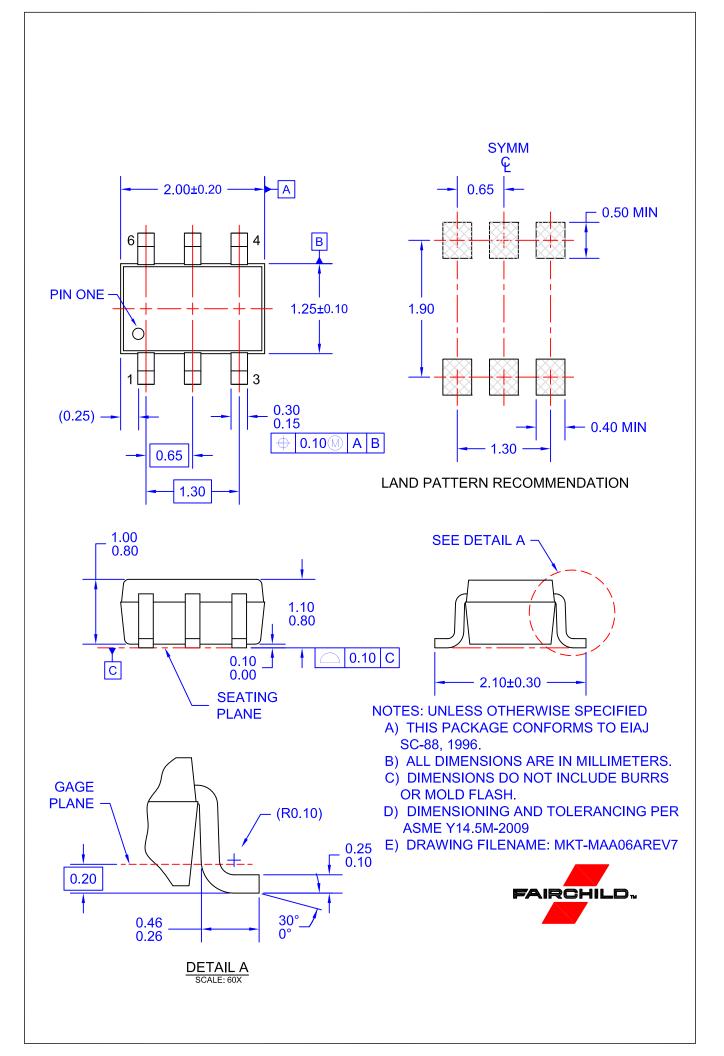

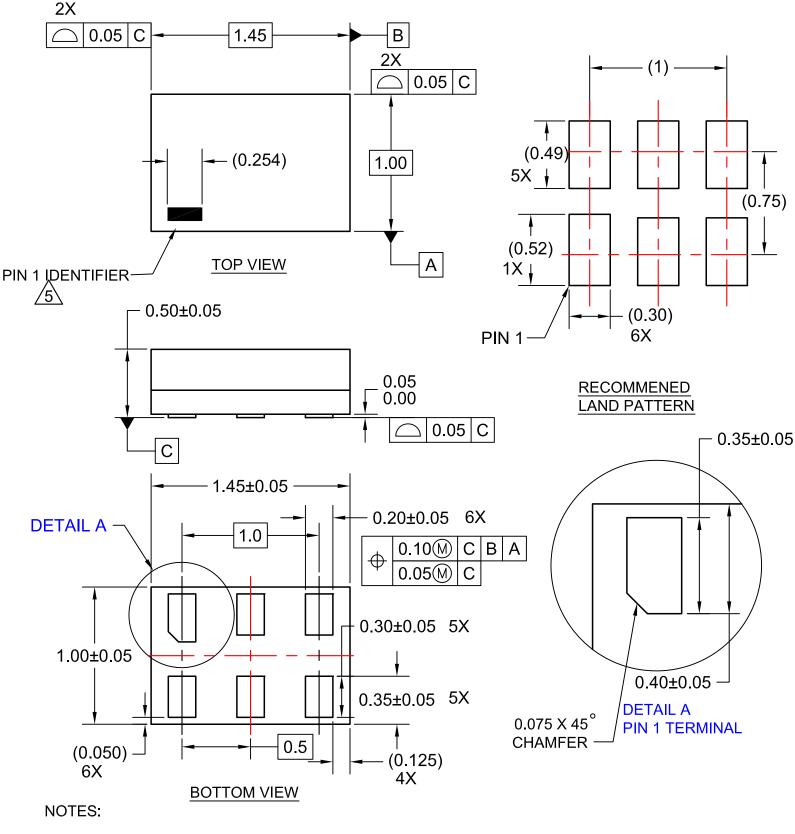

- 1. CONFORMS TO JEDEC STANDARD MO-252 VARIATION UAAD
- 2. DIMENSIONS ARE IN MILLIMETERS
- 3. DRAWING CONFORMS TO ASME Y14.5M-2009
- 4. LANDPATTERN RECOMMENDATION PER FSC
- 5. PIN ONE IDENTIFIER IS 2X LENGTH OF ANY
- OTHER LINE IN THE MARK CODE LAYOUT.
- 6. FILENAME AND REVISION: MAC06AREV6



ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

### PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

onsemi:

FSA4157L6X FSA4157P6X FSA4157P6 FSA4157AL6X FSA4157AP6X