

DIMENSIONS					
POSITIONS	A	B	C	D	E(REF)
9	30.81	24.99	16.33	7.90	15.50
15	39.19	33.32	24.66	7.90	23.93
25	53.04	47.04	38.38	7.90	37.56
37	69.32	63.50	54.84	7.90	54.01
50	67.00	61.10	52.20	10.90	51.80

MATERIAL:

SHELL: STEEL, NICKEL PLATED
 INSULATOR: UL 94V-O RATED, PBT-BLACK
 PROCESS TEMP: 230°C
 CONTACTS: BRASS - GOLD PLATED
 HARDWARE: NICKEL PLATED BRASS

ELECTRICAL:

CURRENT RATING: 5 AMPS
 CONTACT RESISTANCE: 10 mOhms Max.
 INSULATION RESISTANCE: 5,000 MOhms min.
 WORKING VOLTAGE: 250VAC RMS
 OPERATING TEMPERATURE: -55°C TO 100°C

172-YYY-28YLYY1

- SERIES _____
- POSITIONS _____
- 009 _____
- 015 _____
- 025 _____
- 037 _____
- 050 _____
- GENDER _____
- 1 = FEMALE _____
- TERMINATION _____
- 8 = HIGH PROFILE VERTICAL _____
- SHELL PLATING _____
- 3 = NICKEL (GROUND INDENTS) _____
- RoHS COMPLIANT _____
- HARDWARE OPTIONS _____
- 00 = NO HARDWARE _____
- 01 = 2.50mm CLINCH NUT (BOARD SIDE) _____
- 02 = 5.80mm CLINCH NUT (BOARD SIDE) _____
- 03 = 5.80mm CLINCH NUT (MATING SIDE) _____
- PLATING OPTIONS _____
- 1 = GOLD FLASH _____

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING




THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.


DRAWN: W. ROBBINS
 DATE: 08/23/1998

NorComp


SCALE: NTS	SHEET 1 OF 2	REV 19
DWG NO. 172-YYY-28YLYY1		

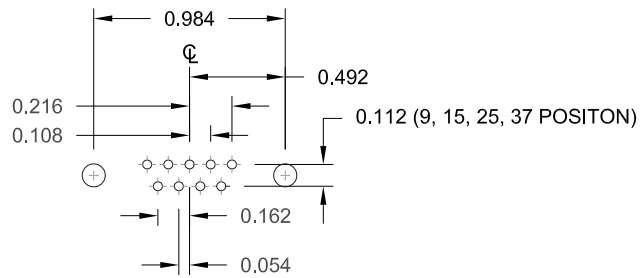


9 POSITION

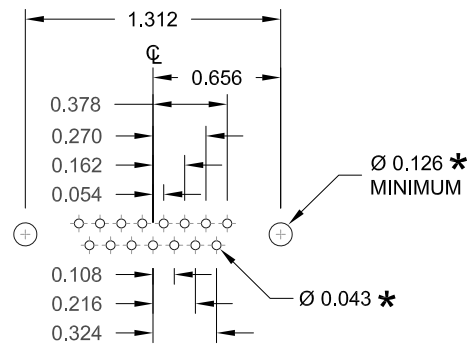


15 POSITION

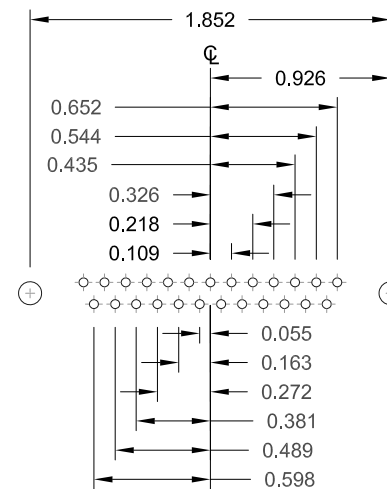

25 POSITION

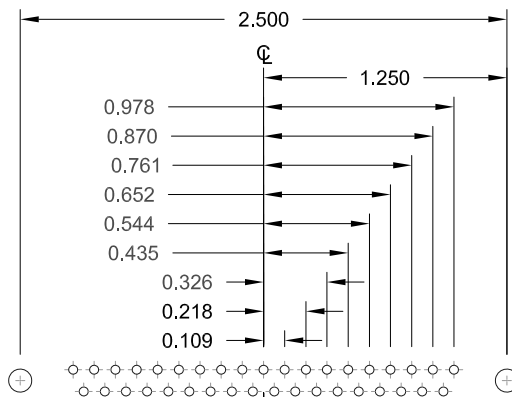

37 POSITION

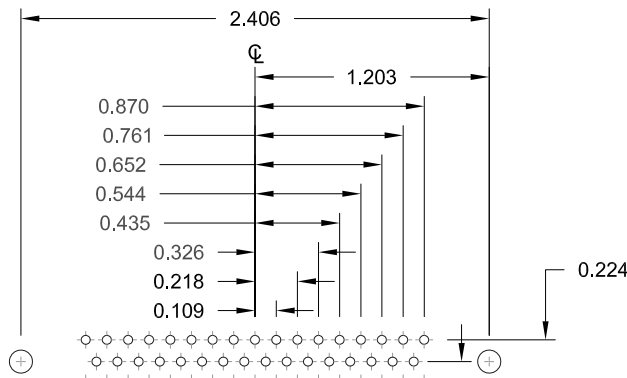

50 POSITION

UNITS = inch

* TYP. SUGGESTED SIZE MAY NOT BE SUITABLE FOR ALL APPLICATIONS

RoHS COMPLIANT

UNITS = inch

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
W. ROBBINS
DATE:
08/23/1998

NorComp

SCALE: NTS	SHEET 2	OF 2	REV 19
DWG NO.		172-YYY-28YLYY1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NorComp:

[172-009-283L001](#) [172-009-283L011](#) [172-009-283L021](#) [172-015-283L011](#) [172-015-283L021](#) [172-015-283L031](#)
[172-025-283L011](#) [172-025-283L021](#) [172-025-283L031](#) [172-037-283L001](#) [172-037-283L011](#) [172-037-283L021](#) [172-037-283L031](#) [172-050-283L011](#) [172-050-283L021](#) [172-050-283L031](#) [172-009-283L031](#)